

OMNI™

Heavy Duty Slot Reader
for Bar Codes and/or Magnetic Stripes



Reads magnetic stripes.

The Omni reads up to three tracks of information with a single swipe in either direction. In combination, the same Omni unit can read both bar code and magnetic stripe media. TTL, RS-232, keyboard wedge, USB/keyboard, USB/RS-232, and Wiegand interfaces are available.

Edits and formats data.

The Omni can be programmed to divide, rearrange, edit, and validate fields of scanned data. In addition, it allows for up to 16 preamble or postamble characters. Data editing for the Wiegand interface can be programmed with an optional RS-232 adaptor cable.

Scans bar codes.

The Omni scans bar codes printed on paper, card stock, or plastic. An infrared option is available for security-based applications, where bar codes are over-printed to prevent duplication.

Stands up to heavy use.

The Omni reader is designed for demanding applications, such as for access control or in self-service kiosks. Its die-cast metal base, stainless steel wearplate, and impact-resistant housing make it ideal for stand-alone, high-volume traffic. Its metal base can be securely mounted with screws, and cable exits are available at the side, end, or bottom of the unit. Weatherproof, sealed, or extended temperature versions are also available for use in harsh environments.

WCR 32X7 Omni Heavy-Duty Slot Reader Specifications

Electrical

Bar Code:	Power +5 VDC +/-10% (35mA maximum). Ground 0 VDC (GND).
Magnetic:	Power +5 VDC +/-10% (50mV ripple maximum). Ground 0 VDC (GND). Chassis Ground connected to GND and magnetic head case.
Operating Current:	About 65mA for combination magnetic stripe (three tracks) and bar code.

Environmental

Operating Temperature:	32°F to 131°F (0°C to 55°C).
Weatherproof/Extended Temperature Option:	-31°F to 140°F (-35°C to 60°C) without ice build-up on magnetic head.*
Storage Temperature:	-31°F to 158°F (-35°C to 70°C) non-condensing.
Humidity:	Maximum 95% non-condensing.

* Minimum quantities apply; extended temperature option not available with bar code feature.

Reliability


Magnetic Head Life:	1,000,000 passes minimum.
Rail and Cover Life:	1,000,000 passes minimum.
Magnetic Read Rate:	Less than one error in 100,000 bits on cards conforming to ISO 7811 1-5 (not induced by operator error).
Warranty:	One year, parts and labor.

Mechanical

Bar Code Source Light:	Visible red 660nm or Infrared 930nm.
Minimum Bar Code PCS:	60%.
Bar Code Centerline:	.49 inches (12.50mm) from bottom of slot to center of reading window.
Bar Code Resolution:	.006 inches (6mil) minimum.
Magnetic Stripe Formats:	ISO 7811, AAMVA, and CA DMV.
Swipe Speed:	Bar Code: 5 to 65 inches per second, bi-directional.** Magnetic Stripe: 3 to 60 inches per second, bi-directional (normal density).
Media Thickness:	Bar Code media: .005 to .050 inches. Magnetic Stripe media: .015 to .050 inches.
Slot Width:	.055 (1.37mm).
Interfaces:	RS-232/keyboard wedge (AT/XT, PS2, Mac, and many others) TTL (undecoded magnetics and/or Bar Code), Standard SIA 26-bit Wiegand, USB/keyboard, USB/RS-232.
Dimensions:	Length: 5 inches (127mm). Width: 2.05 inches (52mm). Height: 1.38 inches (35mm).
Weight:	1.4 lb. (including power pack).
Cable Length:	6-foot straight cable.
Connector:	Keyboard: 6 pin mini DIN. TTL: 9 pin squeeze. RS-232: DB9F. TTL Mag/BC Combo Readers: unterminated cable.



Omni Reader Footprint:

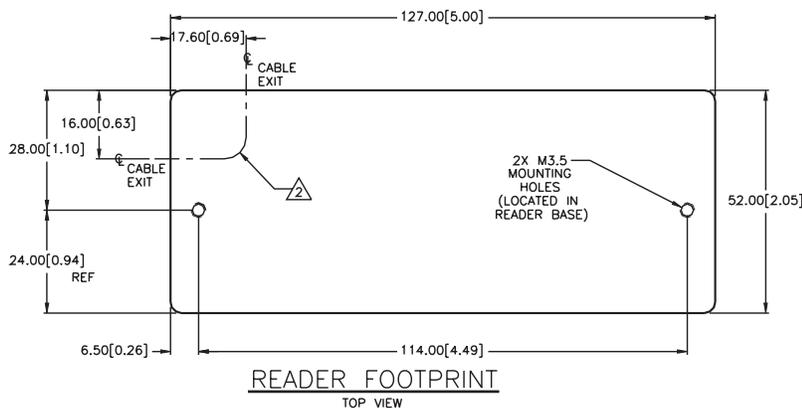

** Media velocity can vary depending on bar code density and quality.

IDTECH[®]
Value through Innovation

10721 Walker Street
Cypress, California 90630
(714) 761-6368 Fax: (714) 761-8880
Visit us at www.idtechproducts.com
ISO 9001-2000 Certified